
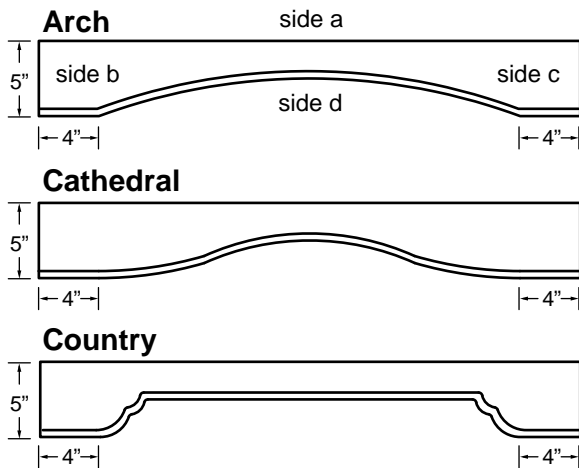


Mouldings

Mouldings in a variety of styles are available in 8' lengths. Moulding drawings are not to scale. Please refer to dimensions provided.

Note: Light Rails are available with any Outside Profile shown on page 2 of the *Product Guide*. Drawing shown here is with O03.

Note: 1304W, 1305W, 1307W, 1308W, and 1309W are not available in Hickory and Quartered White Oak.

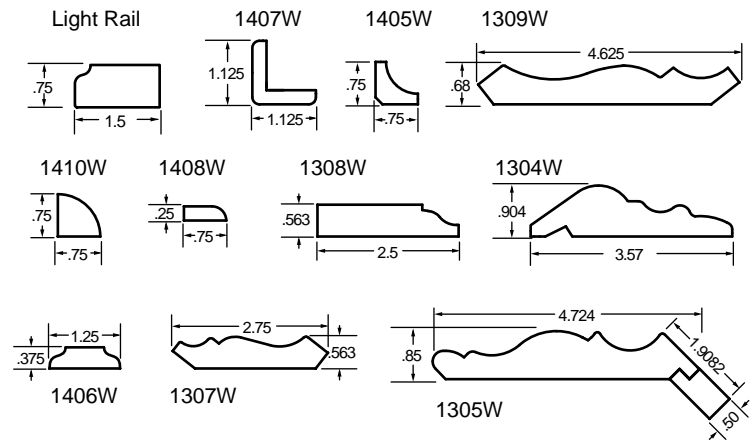


Valances

Valances are available in three styles and 4 standard sizes: 32" x 5", 36" x 5", 42" x 5", and 48" x 5". Sides a, b, and c will have no edge detail; side d will be profiled to match door and drawer fronts unless otherwise specified. All valances have a flat shoulder on either side of the arch.

Fillers

Fillers are available in fluted or slab styles (slab styles are ordered as drawer fronts). Standard flutes start and stop 1" from each end with 1 flute per width inch. Fillers will be profiled on all four edges to match doors and drawer fronts unless otherwise specified. Minimum width is 2"; maximum length is 96".

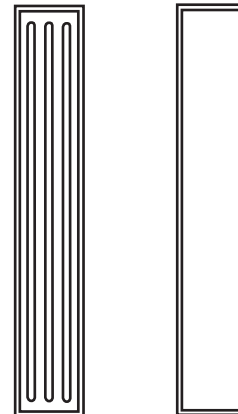

Surfacing Options

Two surfacing options are available for use in fabricating new cabinetry or refacing existing cabinets.

Cut to Size Panels - membrane pressed veneer on a MDF core. Available in Alder, Cherry, Hickory, Maple, Quartered White Oak, and Red Oak. Panel thickness is 5mm. Edges are raw. Maximum size is 30" x 96".

PSA - veneer with a pressure sensitive adhesive developed specifically for cabinet refacing applications. You will achieve the best adhesion by thoroughly cleaning the surface and then lightly sanding. This material is available in 2' x 8' sheets.