

BARE SHAKER


PAINTABLE MDF COMPONENTS







NORTHERN CONTOURS

BARE SHAKER SPECIFICATIONS

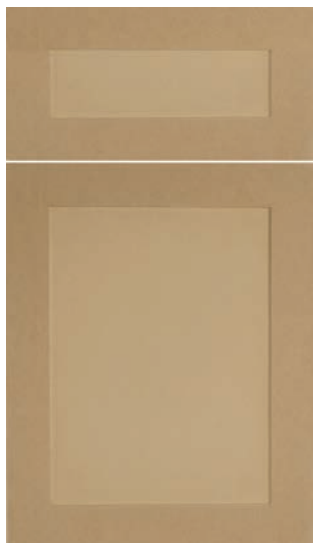

Door | Drawer Front



Frame



PROFILE SPECIFICATIONS

DOOR STYLE	Square
CONSTRUCTION	1/16" radius outside edges 1/4" depth on center panel 85 degree inside bevel
CORE MATERIAL	Superior grade 1/4", 1/2" and 3/4" MDF
BARE SHAKER COMPONENTS	Door, Dwr, Slab Dwr, Overlay, Frame, Multi-Panel

ADDITIONAL OPTIONS

ROUTE FOR GLASS	3/4" MDF Standard frame route for glass shown T-slot route available
MULTI-PANELS	Vertical or horizontal configurations
FINGERPULLS	N/A
HINGE BORING	4 standard patterns Custom placement available
MODIFICATIONS	N/A

SIZE PARAMETERS

DOORS DRAWER FRONTS	5.134" x 5.134" minimum 48" x 96" maximum, warranted to 31" x 60"
REDUCED RAIL DRAWER FRONTS	N/A
SLAB DRAWER FRONTS	3" x 3" minimum
OVERLAYS	2.5" x 6" minimum
FRAMES	6.634" x 6.634" minimum 31" x 60" maximum
GLASS SIZING	Standard route is 1/4" deep for glass retainer clips Subtract 3.709" from width and height to determine glass size with 1/16" clearance on all sides T-slot route is 3/8" deep for 1/8" glass and retainer strips Subtract 3.259" from width and height to determine glass size with 1/16" clearance on all sides

UNFINISHED COMPONENTS

PAINTING PREPARATION	All components are sold unfinished. We recommend sanding and priming before painting to obtain a consistent finish.
WARRANTY	Unfinished components are warranted for a period of ONE (1) YEAR. Unfinished components must be stored in a climate-controlled environment to minimize expansion and contraction and finished within 30 days. Problems related to poor or improper sealing, painting, or finishing applied by others are excluded from this warranty.



National Sales Office | 866-344-8132
www.northerncontours.com